


- Use and Limitations of Floodplain Maps**
- Users must note the dates of base mapping, aerial photography, river surveys and issue of mapping relevant to dates of development in the map area. Subsequent developments or changes within the floodplain or channel (natural or constructed) will affect flood levels and render site-specific map information obsolete.
 - Floodplain maps are administrative tools which depict minimum flood elevations and floodplain boundaries. Flooding may occur outside of the designated floodplain boundary.
 - Floodplain maps do not provide information on site-specific flood hazards such as, land erosion or high water velocity, sudden shifts in the channel of the watercourse, or alluvial and debris flow fan areas.
 - Other sources of water, roads, railways or other barriers can restrict water flow and affect local flood levels. As well, obstructions such as ice and debris, flooding in surrounding areas, channel deposition, groundwater or other phenomena can cause flood levels to exceed those indicated on the map. Land adjacent to a floodplain may be subject to flooding from tributary watercourses.
 - Floodplain maps do not indicate or locate legal survey boundaries. A site survey is required to reconcile property location, ground elevations, and designated flood level information.
 - The accuracy of the location of a floodplain boundary as shown on this map is limited by the base topography; it is generally assumed to be plus or minus one-half the increment of the ground contours.
 - Professional assistance and detailed engineering analysis are required to address any of the above considerations.

NOTE:
ICE LEVELS HAVE EXCEEDED THE 200 YEAR FREQUENCY
FLOOD LEVELS (Freeboard Included) BY AS MUCH AS 0.8 m AT QUICK.

NOTES	
Produced by:	British Columbia Water Management Branch, Special Projects Section Floodplain Mapping Program.
Survey:	River survey done by Surveys Section, Water Management Branch, September 1985, Project No. 85-RPP12. a) Horizontal control based on provincial network. b) Elevations are in metres and are referred to Geodetic Survey of Canada datum. (⊙ Indicates Survey Monument)
Mapping:	Base mapping done by Map Production Division, Surveys and Resource Mapping Branch, February 1984, Project No. 82-Q71T-0. a) Contour interval 2.0 metre and greater; spot elevations shown to 0.5 metres, with accuracy to ± 0.5 metres, except where noted. b) Grid origin referred to U.T.M. Projection Zone 9.

FLOODPLAIN DATA	
a)	The Designated Flood has a statistical frequency of occurrence of once every 200 years.
b)	The flood levels were computed using a standard step method modelling technique, assuming open water flow conditions.
c)	The floodplain limits assume the absence of all dykes.
d)	The floodplain limits and flood levels include an allowance for freeboard.
e)	The floodplain limits are not established on the ground by legal survey.
f)	The floodplain limits are not delineated for side streams and tributaries.
g)	The required setback of buildings from the natural boundaries of lakes and watercourses to allow for the passage of floodwaters and possible bank erosion is not shown. This information is available either through local municipalities or the Ministry of Environment.

LEGEND	
	DESIGNATED FLOODPLAIN LIMIT FLOOD LEVEL (Freeboard Included) 200 Year Frequency
	(G.S.C. DATUM)

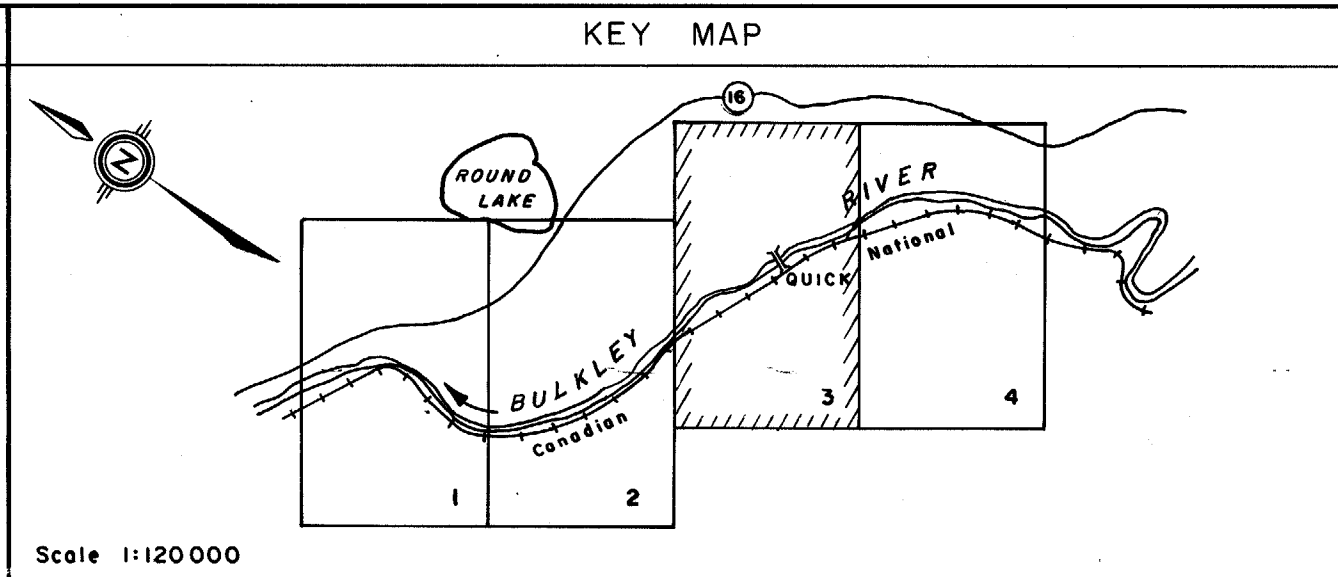

REVISIONS		
No.	DESCRIPTION	DATE

ISSUE OF MAPPING	DATE
	NOVEMBER 1986
DRAWN	N.F.A.
CHECKED	P.T.D.
RIVER SURVEY	T.M.D.
DESIGNED	F.W.D.
ENGINEER	R.W. Gills

	Ministry of Environment Water Management Branch
PRELIMINARY FLOODPLAIN MAPPING	
BULKLEY RIVER	
QUICK AREA	
RECOMMENDED	APPROVED

FILE No.	46-0000-S.1
N.T.S. MAP No.	93 L/10
SCALE	1 : 5 000
NEGATIVE No.	280 150
DRAWING No.	86-23-3
SHEET	3 of 4