


SEE SHEET 7

NOTE: AREAS WITHIN THE FLOODPLAIN LIMITS THAT ARE ELEVATED ABOVE THE FLOOD LEVELS SHOWN MAY BE SUBJECT TO FLOODING FROM THE OVERFLOW OF UPSTREAM BANKS.

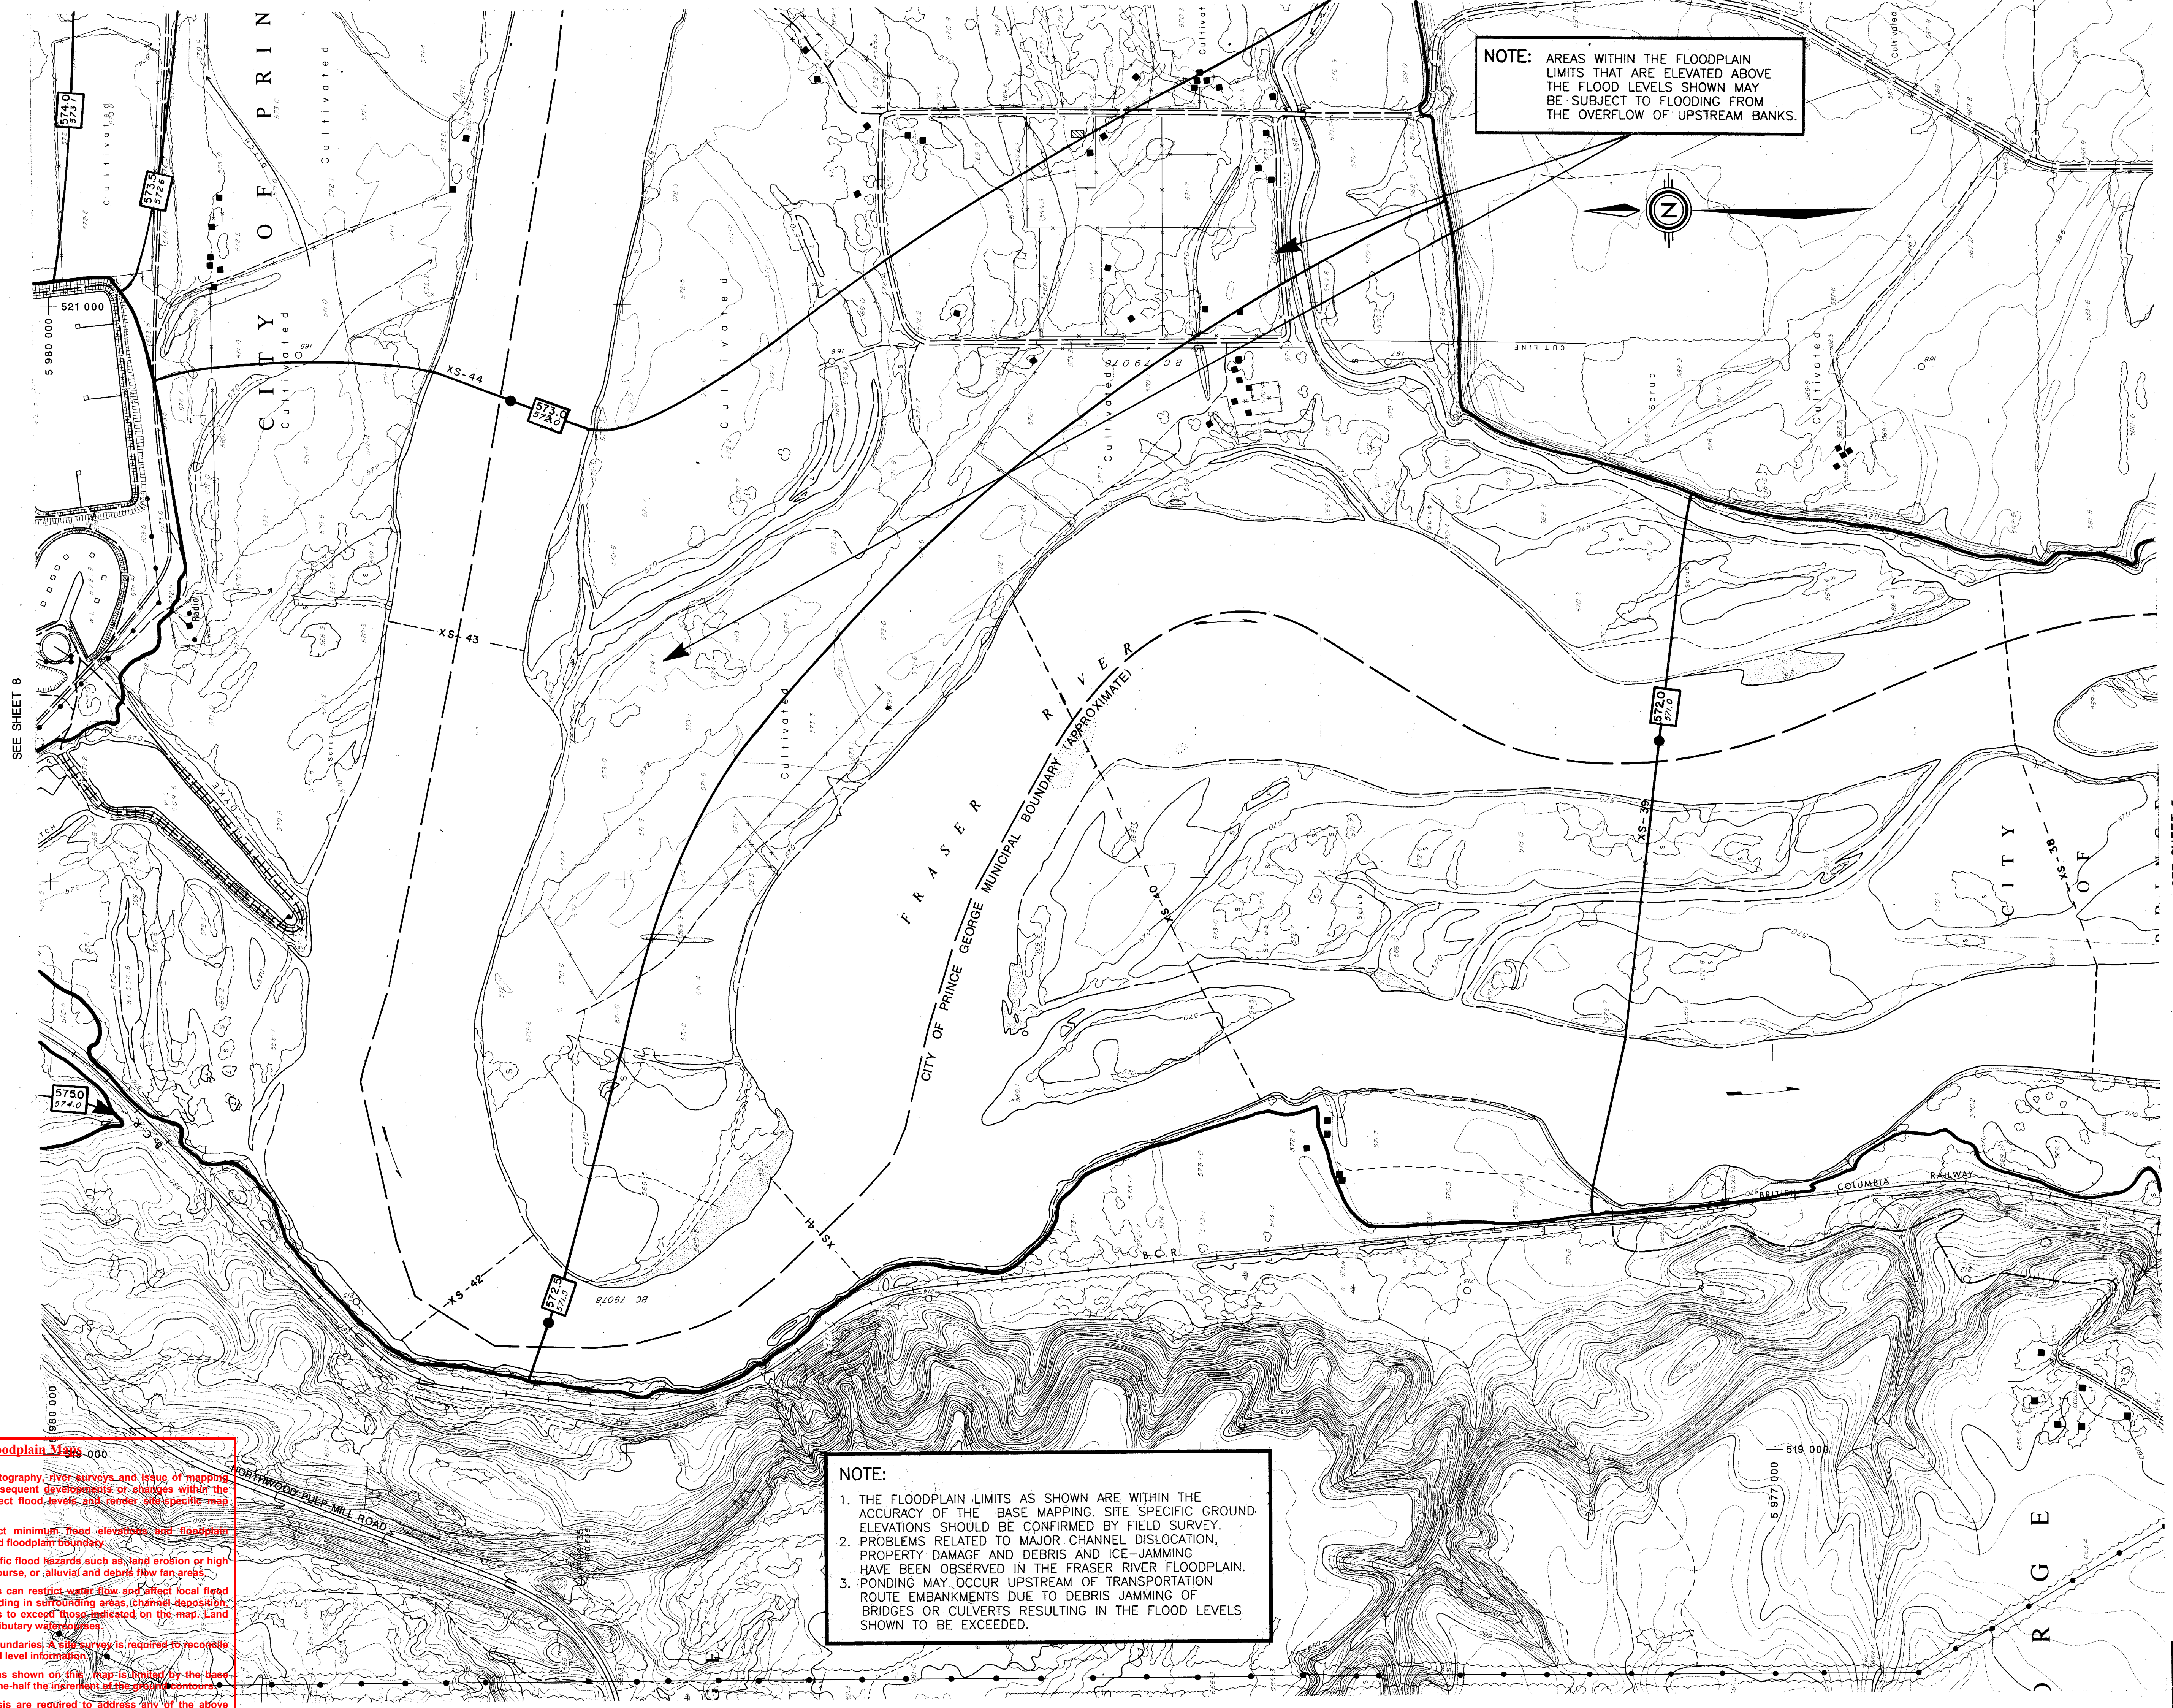

SEE SHEET 8

SEE SHEET 5

Use and Limitations of Floodplain Maps

- Users must note the dates of base mapping, aerial photography, river surveys and issue of mapping relevant to dates of development in the map area. Subsequent developments or changes within the floodplain or channel (natural or constructed) will affect flood levels and render site-specific map information obsolete.
- Floodplain maps are administrative tools which depict minimum flood elevations and floodplain boundaries. Flooding may occur outside of the designated floodplain boundary.
- Floodplain maps do not provide information on site-specific flood hazards such as land erosion or high water velocity, sudden shifts in the channel of the watercourse, or alluvial and debris flow fan and other sources of water, roads, railways or other barriers can restrict water flow and affect local flood levels. As well, obstructions such as ice and debris, flooding in surrounding areas, channel deposition, groundwater or other phenomena can cause flood levels to exceed those indicated on the map. Land adjacent to a floodplain may be subject to flooding from tributary water courses.
- Floodplain maps do not indicate or locate legal survey boundaries. A site survey is required to reconcile property location, ground elevations, and designated flood level information.
- The accuracy of the location of a floodplain boundary as shown on this map is limited by the base topography. It is generally assumed to be plus or minus one-half the instrument of the base topography.
- Professional assistance and detailed engineering analysis are required to address any of the above considerations.

NOTE:
1. THE FLOODPLAIN LIMITS AS SHOWN ARE WITHIN THE ACCURACY OF THE BASE MAPPING. SITE SPECIFIC GROUND ELEVATIONS SHOULD BE CONFIRMED BY FIELD SURVEY.
2. PROBLEMS RELATED TO MAJOR CHANNEL DISLOCATION, PROPERTY DAMAGE AND DEBRIS AND ICE-JAMMING HAVE BEEN OBSERVED IN THE FRASER RIVER FLOODPLAIN.
3. PONDING MAY OCCUR UPSTREAM OF TRANSPORTATION ROUTE EMBANKMENTS DUE TO DEBRIS JAMMING OF BRIDGES OR CULVERTS RESULTING IN THE FLOOD LEVELS SHOWN TO BE EXCEEDED.

NOTES		FLOODPLAIN DATA		LEGEND	KEY MAP	REVISIONS		ISSUE OF MAPPING		ENVIRONMENT CANADA INLAND WATERS ENVIRONNEMENT CANADA EAUX INTERIEURES		BRITISH COLUMBIA MINISTRY OF ENVIRONMENT AND PARKS COLUMBIE-BRITANNIQUE MINISTÈRE DE L'ENVIRONNEMENT ET PARCS		CANADA-BRITISH COLUMBIA FLOODPLAIN MAPPING AGREEMENT L'ACCORD CANADA-COLUMBIE-BRITANNIQUE SUR LA CARTOGRAPHIE DES PLAINES D'INONDATION		FILE NO. 35100-30/100-000P																	
Produced by: British Columbia Water Management Division, Hydrology Branch, Flood Identification Section, River survey done by: Water Management Division, Hydrology Branch, Technical Support Section, Projects 79UC-4 and 95 03 FDR.		1. The floodplain areas as depicted on this map have been designated pursuant to the Canada/British Columbia Floodplain Mapping Agreement 1988 by the Minister of the Environment for Canada and the Minister of Environment, Lands and Parks for British Columbia. Flooding may still occur outside of the designated floodplain areas. The Ministers do not assume any liability by reason of the designation or failure to designate areas on this map.				No		DATE September 30, 1997		DRAWN A. D.		CHECKED B. B.		RIVER SURVEY M. P.		DESIGNED B. B.		ENGINEER R. J. Robson		RECOMMENDED R. W. Nield		APPROVED [Signature]		N.T.S. MAP NO. 93G, 93J		SCALE 1:5 000		NEGATIVE No.		DRAWING NO. REV. 91-3-6		SHEET 6 of 12	
Mapping: Base mapping done by Lands Services Division, Survey and Mapping Branch, (SRMB) Topo/GS Section, Project 81-B2 dated MAY 27, Air photography July 1975 a) Contour interval 2 metres and greater, with spot elevations shown to 0.1 metres, with a specified accuracy of ± 0.5 metres, except where noted. Contact SRMB for further details on base mapping specifications. b) Grid origin referred to U.T.M. Projection Zone 10.		2. The flood levels were computed using a standard step method modelling technique, assuming open water flow conditions. 3. The floodplain limits assume the absence of all dikes. 4. The floodplain limits and flood levels include an allowance for freeboard. 5. The floodplain limits are not established on the ground by legal survey. 6. The floodplain limits are not delineated for side streams and tributaries. 7. The required setback of buildings from the natural boundaries of lakes and watercourses to allow for the passage of floodwaters and possible bank erosion is not shown. This information is available either through local municipalities or the Ministry of Environment, Lands and Parks.				DESCRIPTION		DATE		FLOODPLAIN MAPPING FRASER & NECHAKO RIVERS AT PRINCE GEORGE		Scale in metres 100m 0 100 200 300 400 500m																					