



Use and Limitations of Floodplain Maps

- Users must note the dates of base mapping, aerial photography, river surveys and issues of mapping relevant to dates of development in the map area. Subsequent developments or changes within the floodplain or channel (natural or constructed) will affect flood levels and render the specific map information obsolete.
- Floodplain maps are administrative tools which depict minimum flood elevations and floodplain boundaries. Flooding may occur outside of the designated floodplain boundary.
- Floodplain maps do not provide information on site-specific flood hazards such as, flood erosion or high water velocity, sudden shifts in the channel of the watercourse, or alluvial and debris flow fan areas.
- Other sources of water, roads, railways or other barriers can restrict water flow and affect local flow levels. As well, obstructions such as ice and debris, flooding in surrounding areas, channel deposition, groundwater or other phenomena can cause flood levels to exceed those indicated on the map. Land adjacent to a floodplain may be subject to flooding from tributary watercourses.
- Floodplain maps do not indicate or locate legal survey boundaries. A site survey is required to reconcile accuracy to known ground elevations and designated flood level information.
- The accuracy of the location of a floodplain boundary as shown on this map is limited by the time topography. It is generally assumed to be plus or minus one-half the increment of the ground contour.
- Professional assistance and detailed engineering analysis are required to address any of the above considerations.

MAPPING

BRITISH COLUMBIA WATER RESOURCES SERVICE FLOODPLAIN MAPPING PROGRAM

- SURVEYS
 - Horizontal Control based on Provincial Network
 - Vertical Control based on Geodetic Survey of Canada (1968)
- MAPPING
 - Contour interval 1 metre and greater. Spot elevations shown to 0.1 metres with accuracy ± 0.15 metres.
 - Grid origin referred to UTM Projection Zone 11
 - Cadastral detail approximate only and based on best local information.


FLOODPLAIN LIMITS

- Flood profiles were computed by a standard step method modelling technique.
 - Floodplain Limits shown assume absence of all dykes.
 - Floodplain Limits and Flood Levels include 2 ft. (0.61 m) allowance for freeboard.
 - Position of floodplain boundary not established on ground by legal survey.
 - See "Flood Control Requirements" * for minimum distance allowed from building to natural boundaries of water courses and lakes.
 - Floodplain Limits are not delineated for side streams or tributaries.
- * Correspondence to Municipalities October 30, 1973.

LEGEND

- 200 Year Frequency Floodplain Limit
- 20 Year Frequency Floodplain Limit
- 351.2 Flood Level 200 Year Frequency Flood in Metres
- 349.6 Flood Level 20 Year Frequency Flood in Metres

KEY MAP

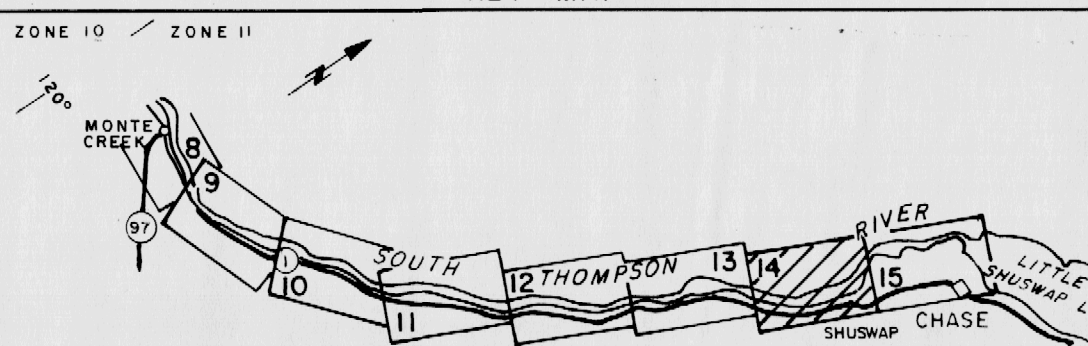

SEE CONTINUATION OF KEY MAP ON SHEET B

SCALE 1:250,000

REVISIONS

NO.	DESCRIPTION	DATE
1	MONUMENTS ADDED	JUNE 1988

ORTHOPHOTO
DATE OF PHOTOGRAPHY:
OCT. 14, 1974

MAPPING
INFORMATION

CHECKED
FLOOD PLAIN
INFORMATION

CHECKED
ISSUE OF MAPPING

DATE JUNE, 1976

BRITISH COLUMBIA
DEPARTMENT OF ENVIRONMENT
WATER RESOURCES SERVICE
WATER INVESTIGATIONS BRANCH

KAMLOOPS to CHASE
FLOOD PLAIN MAPPING

SOUTH THOMPSON RIVER

SCALE IN METRES

100 50 0 100 200 300 400 500

RECOMMENDED
DIVISION CHIEF

APPROVED
DEPUTY MINISTER

FILE NUMBER

0310213-4

SCALE

1:5,000

DWG. NO.

5113

14 SHEET

OF 15