


SEE SHEET 2

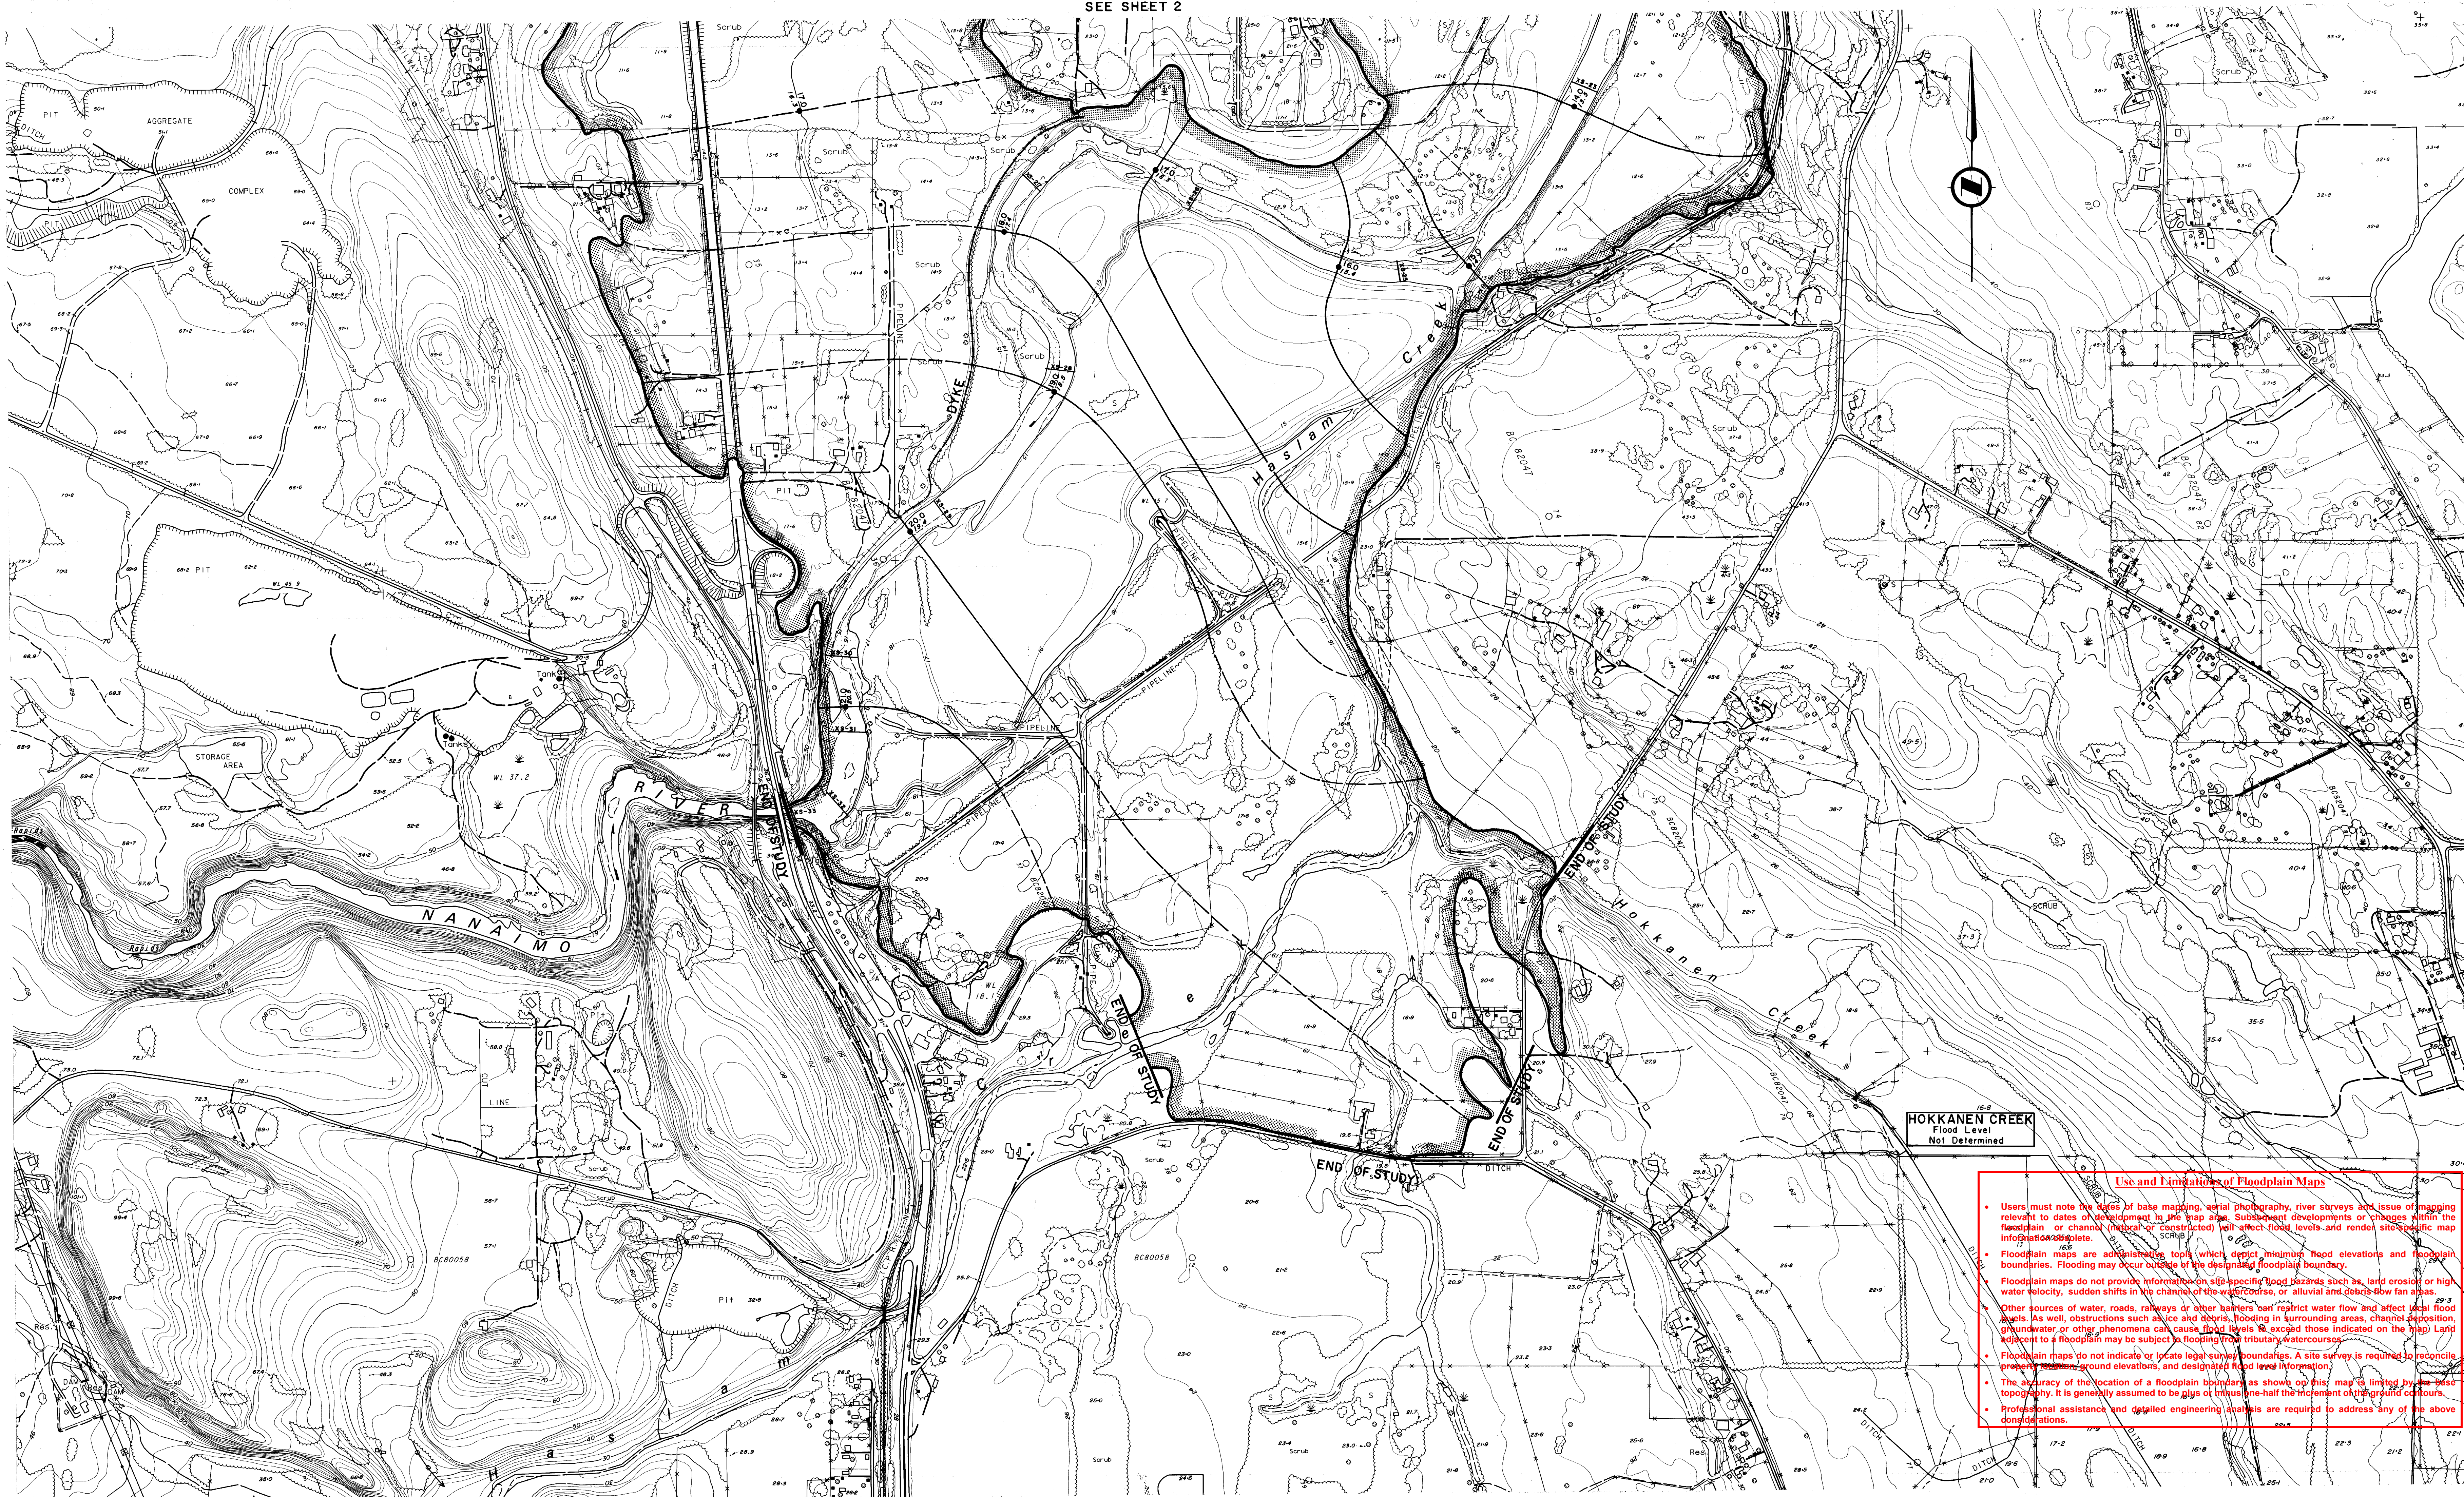

HOKKANEN CREEK
Flood Level
Not Determined

Use and Limitations of Floodplain Maps

- Users must note the limits of base mapping, aerial photography, river surveys and issue of mapping relevant to dates of development in the map area. Subsequent developments or changes within the floodplain, or channel (natural or constructed) will affect flood levels and render site specific map information obsolete.
- Floodplain maps are administrative tools which depict minimum flood elevations and floodplain boundaries. Flooding may occur outside of the designated floodplain boundary.
- Floodplain maps do not provide information on site specific flood hazards such as: land erosion or high water velocity, sudden shifts in the channel of the watercourse, or alluvial and debris flow fan areas.
- Other sources of water, roads, railways or other barriers can restrict water flow and affect local flood levels. As well, obstructions such as ice and debris, flooding in surrounding areas, channel deposition, groundwater or other phenomena can cause flood levels to exceed those indicated on the map. Land adjacent to a floodplain may be subject to flooding from tributary watercourses.
- Floodplain maps do not indicate or locate legal survey boundaries. A site survey is required to reconcile property boundaries, ground elevations, and designated flood level information.
- The accuracy of the location of a floodplain boundary as shown on this map is limited by the base topography. It is generally assumed to be plus or minus one-half the increment of the ground contours.
- Professional assistance and detailed engineering analysis are required to address any of the above considerations.

NOTES

Produced by: British Columbia Water Management Branch
Floodplain Mapping Program.


Survey: River survey done by Planning and Surveys Section,
Water Management Branch.
a) Horizontal control based on provincial
network.
b) Elevations are in metres and are referred to Geodetic Survey of
Canada Datum.

Mapping: Base mapping done by Map Production Division, Surveys and Mapping
Branch.
a) Contour interval: 1 metre and greater; spot elevations shown
to 0.1 metres, with accuracy to 2-3 metres, except where noted.
b) Grid origin referred to U.T.M. Projection Zone 10 (1975).
Final Floodplain Mapping produced by Planning Subsection,
Water Management Branch.


FLOODPLAIN DATA

- The Designated Flood has a statistical frequency of occurrence of once every 200 years.
- Flood levels were computed using a standard step method modelling technique, assuming open water flow conditions.
- Floodplain limits assume the absence of all dikes.
- Floodplain limits and flood levels include allowance for freeboard.
- Position of floodplain boundary not established on the ground by legal survey.
- Floodplain limits are not delineated for side streams and tributaries.
- Required setback of buildings from the natural boundaries of lakes and watercourses to allow for the passage of floodwaters and possible bank erosion are not shown. This information is available either through local municipalities or the Ministry of Environment.
- Areas within the floodplain limit having an elevation above the computed flood level are subject to possible flooding from overflow of upstream banks.

LEGEND

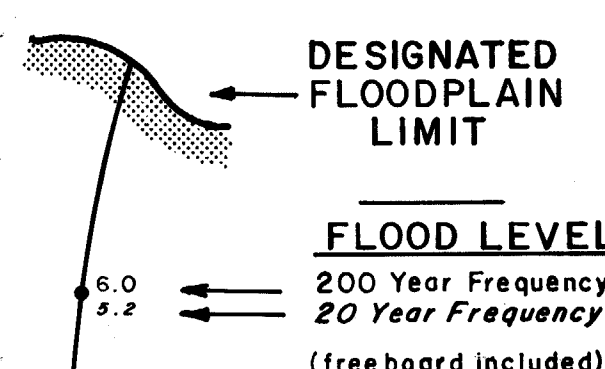

KEY MAP

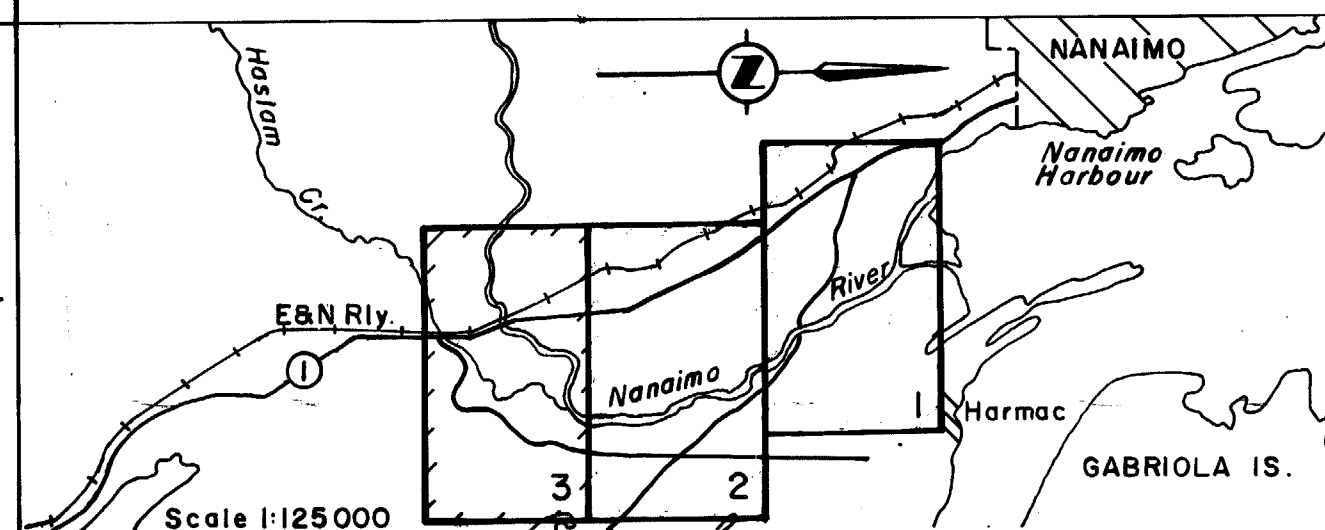

REVISIONS

No.	DESCRIPTION	DATE
1		
2		
3		

TOPOGRAPHIC MAPPING

DATE OF PHOTOGRAPHY
SEPT. 1, 1982

FLOODPLAIN STUDIES

TECHNICIAN
F. W. DANKS

ENGINEER
R. W. NICHOLS

ISSUE OF MAPPING

DATE
MAY 1984

Province of
British Columbia

Ministry of Environment
Water Management Branch

FLOODPLAIN MAPPING NANAIMO RIVER

Scale in metres
100 200 300 400 500

Recommended: [Signature] Approved: [Signature]
Section Head Deputy Minister

FILE No.
0305030-19

SCALE
1:5000

NEGATIVE No.

DRAWING No.

84-29-3

SHEET
3 of 3

260781 DD