

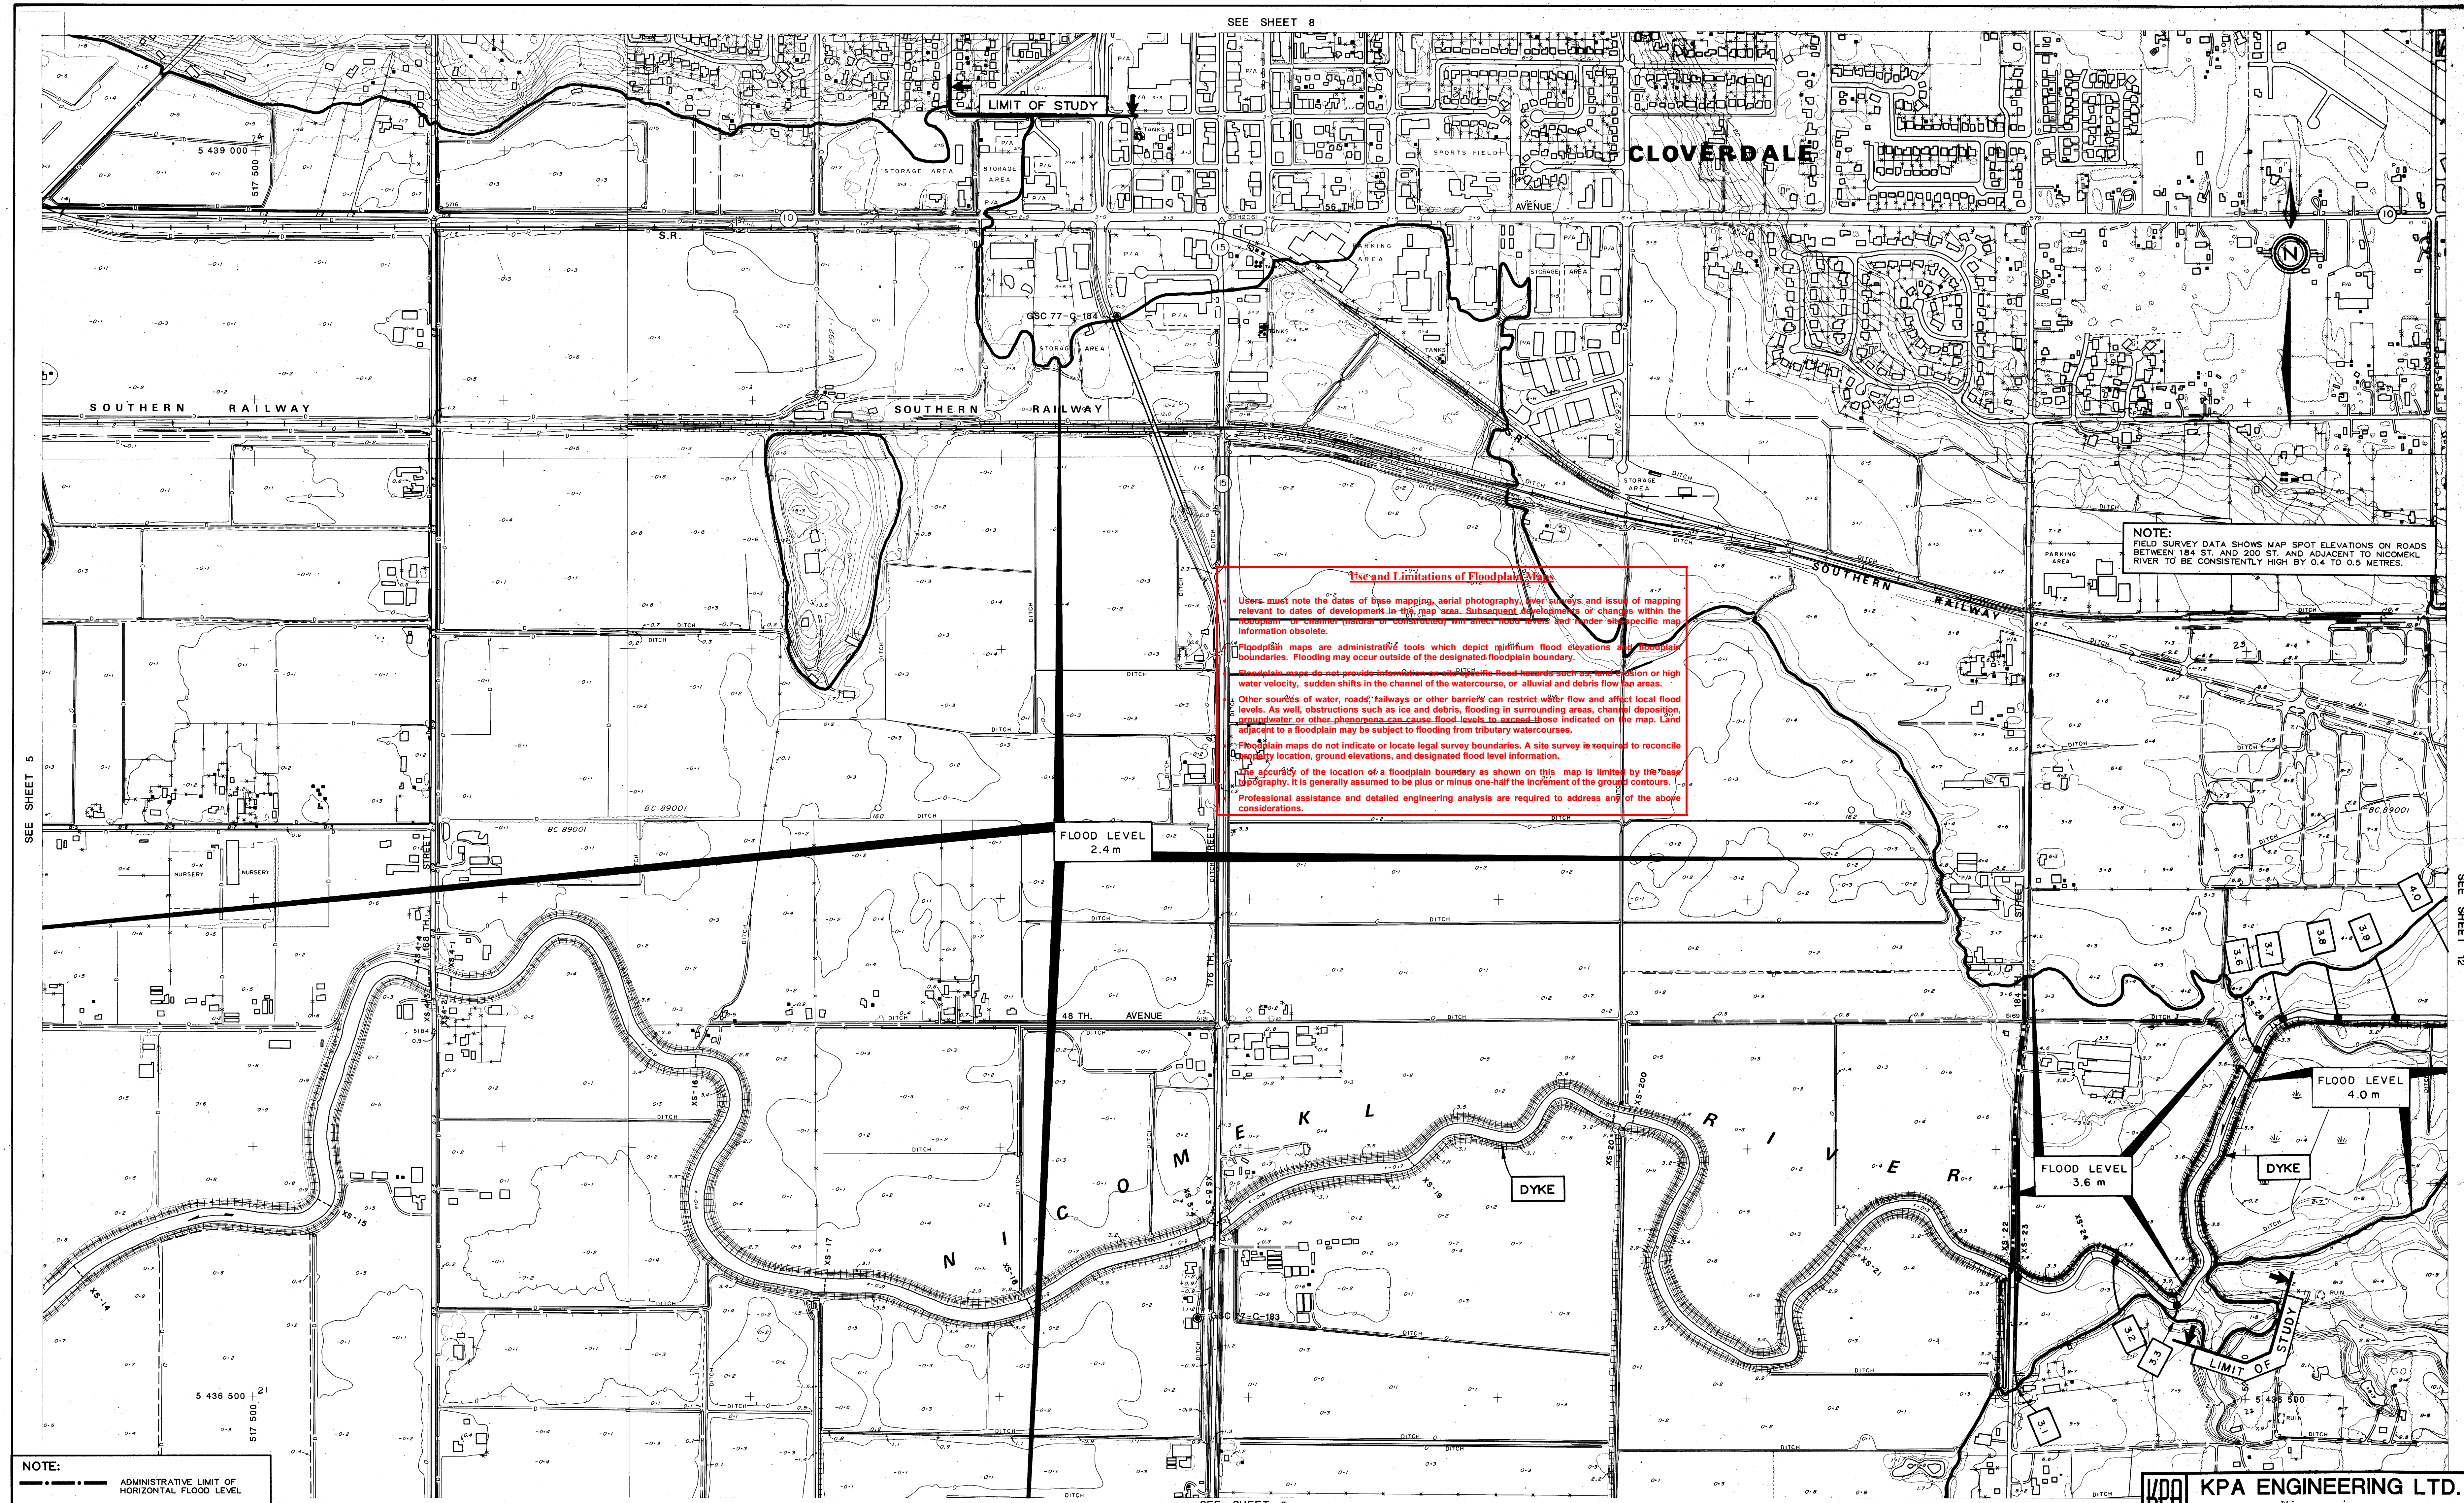


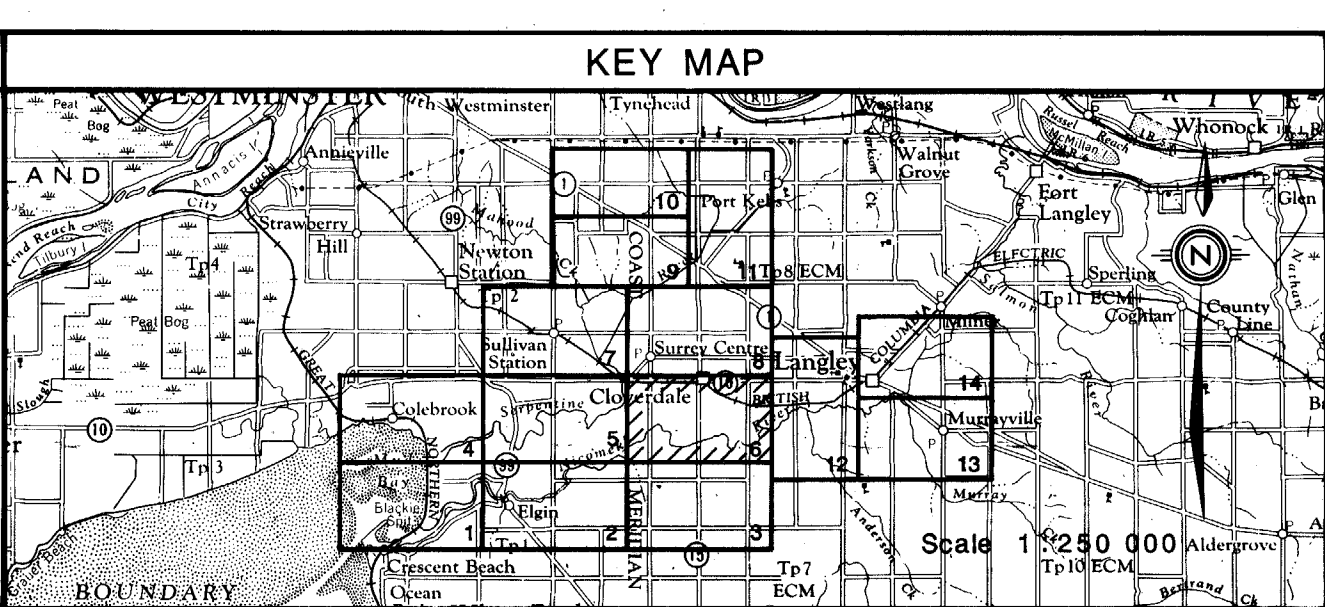

NOTE:
--- ADMINISTRATIVE LIMIT OF
HORIZONTAL FLOOD LEVEL
--- DESIGNATED FLOODPLAIN LIMIT

NOTES
Produced by: British Columbia Water Management Division, Flood Hazard Identification Section, Floodplain Mapping Program.
Survey: River survey done by Surveys Section, Water Management Branch, Project 01-02-P-041.
a) Horizontal control based on provincial network.
b) Elevations are in metres and are referred to Geodetic Survey of Canada datum. (Q indicates Survey Monument).
Mapping: Base mapping done by Map Production Division, Surveys and Resource Mapping Branch, Project 07-085 dated May, 1990, NAD 27, Air photography 1986.
a) Grid origin referred to U.T.M. Projection Zone 10.
b) In well defined areas not obscured by vegetation or shadow, randomly selected points on a 1:50,000 scale map will have an accuracy of ± 1.0 m (the contour interval for 90% of the points, and spot elevations will have an accuracy of ± 1.0 m the contour interval for 90% of the points, unless otherwise specified. See the Floodplain Mapping User's Guide for further details.

FLOODPLAIN DATA
1. The floodplain areas as depicted on this map have been designated pursuant to the Canada/British Columbia Floodplain Mapping Agreement (1988) by the Minister of the Environment for Canada and the Minister of Environment, Lands and Parks for British Columbia.
Floodplain may still occur outside of the designated floodplain areas. The Ministers do not assume any liability by reason of the designation or failure to designate areas on this map.
2. The designated flood has a statistical frequency of occurrence of once every 200 years on average.
3. The flood levels were computed using the One-D Hydrodynamic Model for unsteady flow.
4. The floodplain limits assume that dikes can fail.
5. The floodplain limits and flood levels include an allowance for freeboard.
6. The floodplain limits are not established on the ground by legal survey. Building elevations should be based on a field survey and established bench marks.
7. The floodplain limits are not delineated for side streams and tributaries.
8. The required setback of buildings from the natural boundaries of lakes and watercourses to allow for the passage of floodwaters and possible bank erosion is not shown. This information is available either through local municipalities or the Ministry of Environment, Lands and Parks.
9. MAPS AVAILABLE FROM THE MINISTRY OF ENVIRONMENT, LANDS AND PARKS, SURVEYS AND RESOURCE MAPPING BRANCH, MAPS B.C., MAP AND AIR PHOTO SALES, VICTORIA, B.C.

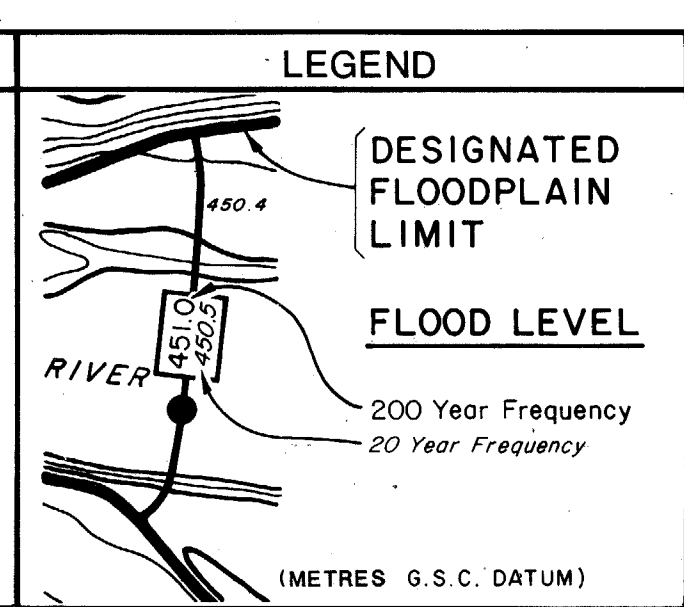

REVISIONS		
No.	DESCRIPTION	DATE
1	Spot heights added on roads and railway	1992-11-9

ISSUE OF MAPPING DATE SEPTEMBER 30, 1994	ENVIRONMENT CANADA EPAI INTERIEURS COLUMBIE-BRITANNIQUE MINISTRE DE L'ENVIRONNEMENT L'ACCORD CANADA COLUMBIE-BRITANNIQUE SUR LA CARTOGRAPHIE DES PLAINES D'INONDATION	FILE No. 900-0055 N.T.S. MAP No. 92G/2 SCALE 1:5 000 NEGATIVE No. DRAWING No. REV. 91-5-6 SHEET 6 of 14
DRAWN S.S./J.J. CHECKED Y.S. RIVER SURVEY DESIGNED Y.S.	FLOODPLAIN MAPPING SERPENTINE & NICOMEKL RIVERS Scale in metres 100m 0 100 200 300 400 500m	
ENGINEER S. J. J.	RECOMMENDED H. W. W.	APPROVED S. J. J.