

Use and Limitations of Floodplain Maps

- Users must note the dates of base mapping, aerial photography, river surveys and issue of mapping relevant to dates of development in the map area. Subsequent developments or changes within the floodplain or channel (natural or constructed) will affect flood levels and render site-specific map information obsolete.
- Floodplain maps are administrative tools which depict minimum flood elevations and floodplain boundaries. Flooding may occur outside of the designated floodplain boundary.
- Floodplain maps do not provide information on site-specific flood hazards such as, land erosion or high water velocity, sudden shifts in the channel of the watercourse, or alluvial and debris flow fan areas.
- Other sources of water, roads, railways or other barriers can restrict water flow and affect local flood levels. As well, obstructions such as ice and debris, flooding in surrounding areas, channel deposition, groundwater or other phenomena can cause flood levels to exceed those indicated on the map. Land adjacent to a floodplain may be subject to flooding from tributary watercourses.
- Floodplain maps do not indicate or locate legal survey boundaries. A legal survey is required to reconcile property location, ground elevations, and designated flood level information.
- The accuracy of the location of a floodplain boundary as shown on this map is limited by the base topography. It is generally assumed to be plus or minus one-half the increment of the ground contours.
- Professional assistance and detailed engineering analysis are required to address any of the above considerations.

MAMQUAM RIVER FAN

FLOODING DEPTH INDETERMINATE
IN CROSS-HATCHED AREAS

SEE SHEET 4




SEE SHEET 2

MAMQUAM RIVER FAN

FLOODING DEPTH INDETERMINATE
IN CROSS-HATCHED AREAS

NOTES	
Produced by: British Columbia Water Management Branch Floodplain Mapping Program.	FLOODPLAIN DATA
Survey: River survey done by Planning and Surveys Section, Water Management Branch. a) General control based on provincial network. b) Vertical control based on Geodetic Survey of Canada (1966).	<p>a) The Designated Flood has a statistical frequency of occurrence of once every 200 years.</p> <p>b) Flood levels were computed using a standard step method modelling technique, assuming open water flow conditions.</p> <p>c) Floodplain limits assume the absence of all dykes.</p> <p>d) Floodplain limits and flood levels include allowance for freeboard.</p> <p>e) Position of floodplain boundary not established on the ground by legal survey.</p> <p>f) Floodplain limits are not delineated for side streams and tributaries.</p> <p>g) Required setback of buildings from the natural boundaries of lakes and watercourses to allow for the passage of floodwaters and possible bank erosion are not shown. This information is available either through local municipalities or the Ministry of Environment.</p> <p>h) Areas within the floodplain limit having an elevation above the computed flood level are subject to possible flooding from overflow of upstream banks.</p>
Mapping: Base mapping done by Map Production Division, Surveys and Mapping Section. a) Contour interval - 1 metre and greater; spot elevations shown to 0.1 metres, with accuracy to ± 0.3 metres, except where noted. b) Map produced in UTM Projection Zone 10 (1975). Final Floodplain Mapping produced by Planning Section, Water Management Branch.	

LEGEND	
	DYKE DESIGNATED FLOODPLAIN LIMIT
	FLOOD LEVEL 15.5 200 Year Frequency 14.9 20 Year Frequency (freeboard included)

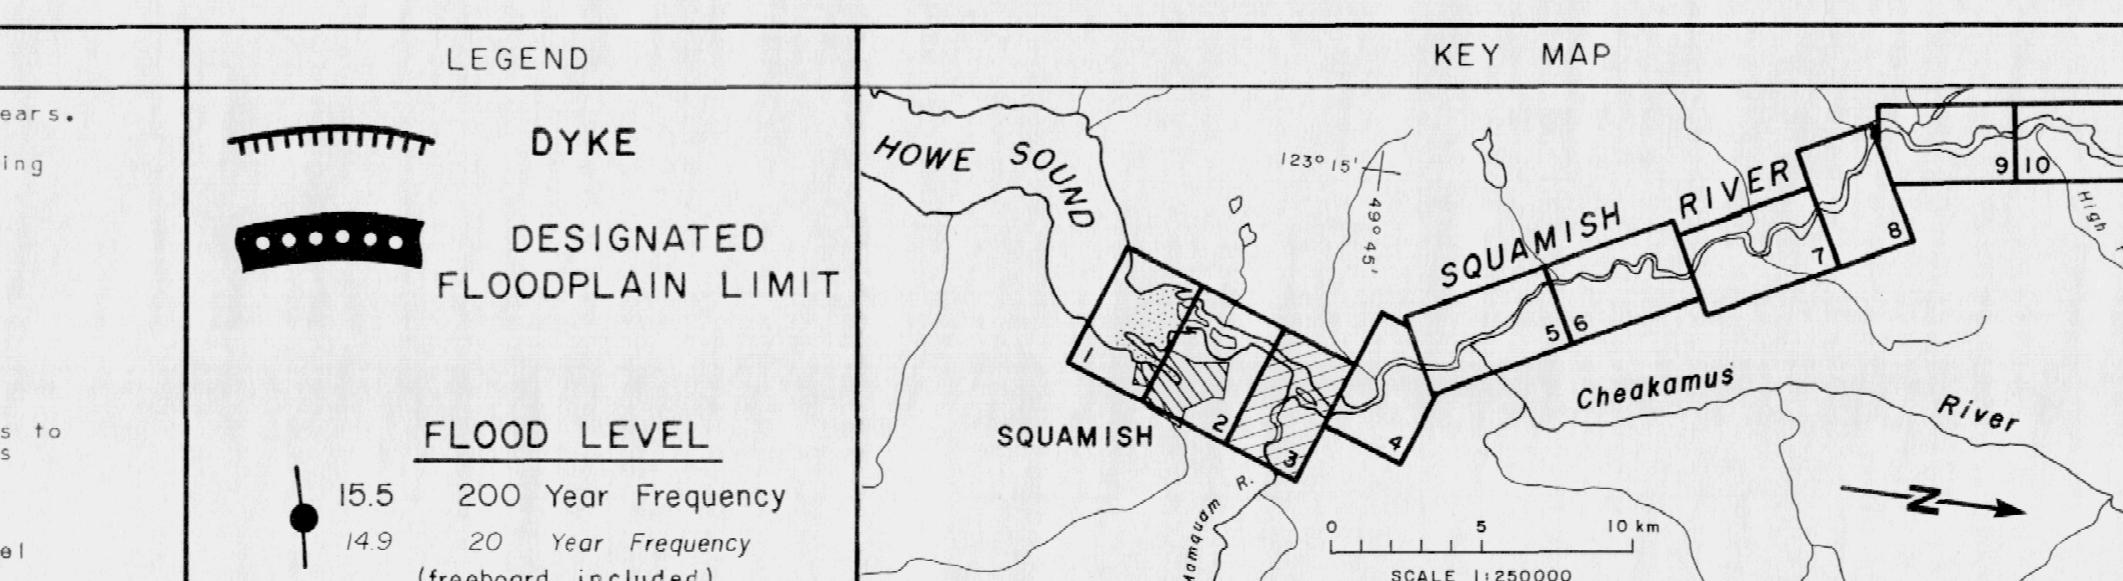

REVISIONS	
ORTHOPHOTO MAPPING DATE OF PHOTOGRAPHY SEPT., 1976	Province of British Columbia Ministry of Environment Water Management Branch
FLOODPLAIN STUDIES TECHNICIAN B. BOARD	
ENGINEER R.W. NICHOLS	
ISSUE OF MAPPING DATE OCT., 1983	FILE No 0305030-26 SCALE 1:5000 DRAWING No 5461-3 Recommended by Section Head Approved by Deputy Minister

